






G 0095




G 0069




G 0081




G 0082



G 0044




G 0070




G 0682



G 0083




G 0102



G 0683



G 0099

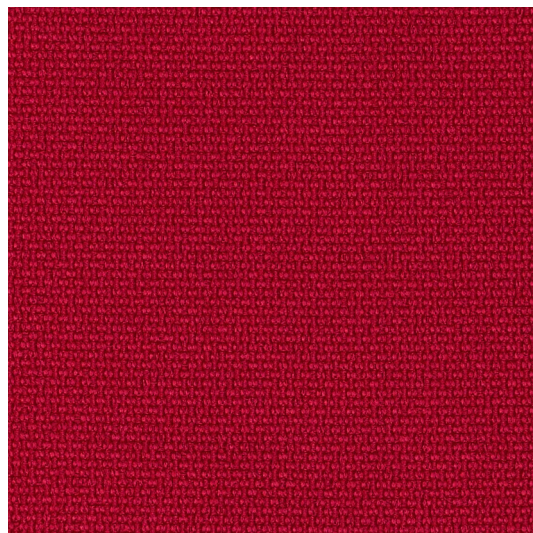

G 0003

**PL**

**Skład**  
100% POLIESTER

**Waga**  
365g/m<sup>2</sup>

**Szerokość rolki**  
140 cm

**Odporność na ścieranie**  
150,000 cykli Martindale  
(EN ISO 12947-2-1998)/AC 2008  
według BS EN 14465:2003

**Pilling**  
4-5 (UNI EN ISO 12945/2):2000

**Odporność na światło**  
6-7 (ISO 105-B02: 2014) Method 2

**Odporność koloru na tarcie:**  
Mokro: 4-5 (UNI EN ISO 105-X12)  
Sucho: 5 (UNI EN ISO 105-X12)

**Certyfikaty trudnopalności**  
-BS EN 1021-1 2014  
-BS EN 1021-2 2014  
-BS 5852 Part1: 1979  
-UNI 9175:2010 Class 11M

**DE**

**Zusammensetzung**  
100% POLYESTER

**Gewicht**  
365g/m<sup>2</sup>

**Rollenbreite**  
140 cm

**Scheuerfestigkeit**  
150,000 Zyklen Martindale  
(EN ISO 12947-2-1998)/AC 2008  
gemäß BS EN 14465:2003

**Pilling**  
4-5 (UNI EN ISO 12945/2):2000

**Lichtechtheit**  
6-7 (ISO 105-B02: 2014) Method 2

**Reibechtheit**  
Nass: 4-5 (UNI EN ISO 105-X12)  
Trocken: 5 (UNI EN ISO 105-X12)

**Feuersicherung**  
-BS EN 1021-1 2014  
-BS EN 1021-2 2014  
-BS 5852 Part1: 1979  
-UNI 9175:2010 Class 11M

**EN**

**Composition**  
100% POLYESTER

**Weight**  
365g/m<sup>2</sup>

**Roll width**  
140 cm

**Abrasion Resistance**  
150,000 Martindale cycles  
(EN ISO 12947-2-1998)/AC 2008  
according to BS EN 14465:2003


**Pilling**  
4-5 (UNI EN ISO 12945/2):2000

**Light Fastness**  
6-7 (ISO 105-B02: 2014) Method 2

**Fastness to Rubbing**  
Wet: 4-5 (UNI EN ISO 105-X12)  
Dry: 5 (UNI EN ISO 105-X12)

**Flammability**  
-BS EN 1021-1 2014  
-BS EN 1021-2 2014  
-BS 5852 Part1: 1979  
-UNI 9175:2010 Class 11M



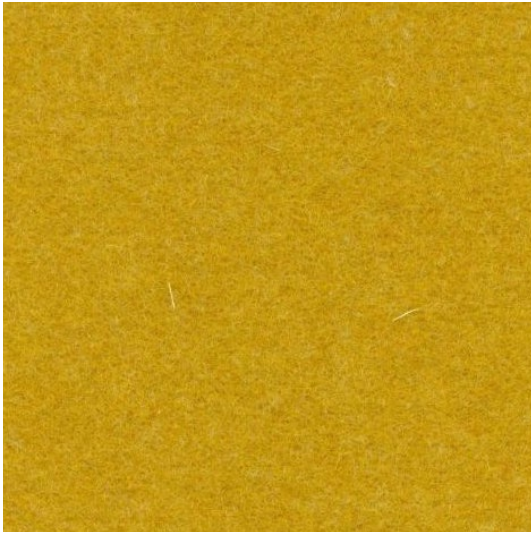

CUZ2W



CUZ39



CUZ18



CUZ21



CUZ90



CUZ63



CUZ1L



CUZ1K




CUZ1N




CUZ31




CUZ02



CUZ1R



CUZ1W




CUZ62




CUZ09



CUZ67



CUZ12



CUZ28



CUZ30



CUZ08



CUZ1E

**PL****Skład**

100% Wełna

**Waga**

460 g/m<sup>2</sup> ± 5%

**Szerokość rolki**

140 cm

**Odporność na ścieranie**

65 000 cykli Martindale'a  
(BS EN ISO 12947-2:2016)

**Pilling**

>3 (UNI EN ISO 12945/2):2000

**Odporność na światło**

5 (BS EN ISO 105:BO2:2014-BS6)

**Odporność koloru na tarcie**

Mokre: 5 (BS EN ISO 105-X12:2016)  
Suche: 4-5 (BS EN ISO 105-X12:2016)

**Certyfikaty trudnopalności**

-BS EN 1021 - 1:2014  
-BS EN 1021 - 2:2014  
-BS7176:2007 Low Hazard  
-UN 9175:2010 1IM  
-NFD60-013

**Czyszczenie**

-na sucho

**DE****Zusammensetzung**

100% Schurwolle

**Gewicht**

460 g/m<sup>2</sup> ± 5%

**Rollenbreite**

140 cm

**Scheuerfestigkeit**

65 000 Zyklen Martindale  
(BS EN ISO 12947-2:2016)

**Pilling**

>3 (UNI EN ISO 12945/2):2000

**Lichtechtheit**

5 (BS EN ISO 105:BO2:2014-BS6)

**Reibechtheit**

Nass: 5 (BS EN ISO 105-X12:2016)  
Trocken: 4-5 (BS EN ISO 105-X12:2016)

**Feuersicherung**

-BS EN 1021 - 1:2014  
-BS EN 1021 - 2:2014  
-BS7176:2007 Low Hazard  
-UN 9175:2010 1IM  
-NFD60-013

**Reinigung**

-Trockenreinigung

**EN****Composition**

100% Virgin Wool

**Weight**

460 g/m<sup>2</sup> ± 5%

**Roll width**

140 cm

**Abrasion Resistance**

65 000 Martindale cycles  
(BS EN ISO 12947-2:2016)

**Pilling**

>3 (UNI EN ISO 12945/2):2000

**Light Fastness**

5 (BS EN ISO 105:BO2:2014-BS6)

**Fastness to Rubbing**

Wet: 5 (BS EN ISO 105-X12:2016)  
Dry: 4-5 (BS EN ISO 105-X12:2016)

**Flammability**

-BS EN 1021 - 1:2014  
-BS EN 1021 - 2:2014  
-BS7176:2007 Low Hazard  
-UN 9175:2010 1IM  
-NFD60-013

**Cleaning**

-dry cleaning

