




BD005




BD012

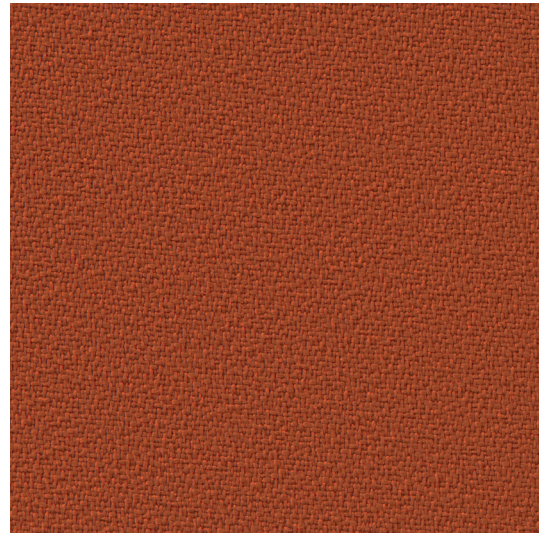


BD013

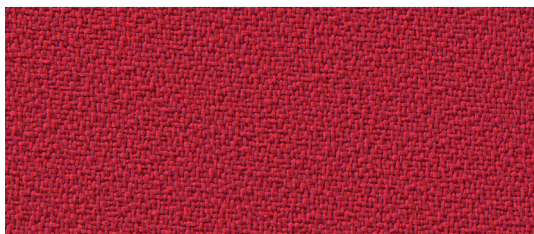

BD011



BD021




BD048




BD008



BD036



BD003



BD071




BD006



BD004



BD078



BD023



BD033

## pl:

### Skład

100% poliester

### Waga

250 g/m<sup>2</sup> ± 5%

### Szerokość rolki

140 cm

### Odporność na ścieranie

>100 000 cykli Martindale'a  
(UNI EN ISO 12947-2:2017)

### Pilling

5 (UNI EN ISO 12945-2:2002)

### Odporność na światło

7 (EN ISO 105-B02:2014)

### Certyfikaty trudnopalności

- BS EN 1021-1:2014
- BS EN 1021-2:2014
- BS 5852:2006 (CRIB 5)
- BS 7176:2007 (Medium Hazard)
- UNI 9175 (1987) 1 IM

### Czyszczenie



Dopuszcza się występowanie różnic odcieni pomiędzy poszczególnymi partiami produkcyjnymi.

## de:

### Zusammensetzung

100% Polyester

### Gewicht

250 g/m<sup>2</sup> ± 5%

### Rollenbreite

140 cm

### Scheuerfestigkeit

>100 000 Zyklen Martindale  
(UNI EN ISO 12947-2:2017)

### Pilling

5 (UNI EN ISO 12945-2:2002)

### Lichtechtheit

7 (EN ISO 105-B02:2014)

### Feuersicherung

- BS EN 1021-1:2014
- BS EN 1021-2:2014
- BS 5852:2006 (CRIB 5)
- BS 7176:2007 (Medium Hazard)
- UNI 9175 (1987) 1 IM

### Reinigung



Farbtonunterschiede zwischen einzelnen Produktionschargen sind zulässig.

## en:

### Composition

100% polyester

### Weight

250 g/m<sup>2</sup> ± 5%

### Roll width

140 cm

### Abrasion resistance

>100 000 Martindale cycles  
(UNI EN ISO 12947-2:2017)

### Pilling

5 (UNI EN ISO 12945-2:2002)

### Light fastness

7 (EN ISO 105-B02:2014)

### Flammability

- BS EN 1021-1:2014
- BS EN 1021-2:2014
- BS 5852:2006 (CRIB 5)
- BS 7176:2007 (Medium Hazard)
- UNI 9175 (1987) 1 IM

### Cleaning



Shade differences between individual production batches are allowed.